



1 | 2 | 3 | 4 | 5 | 6 | 7 | 8

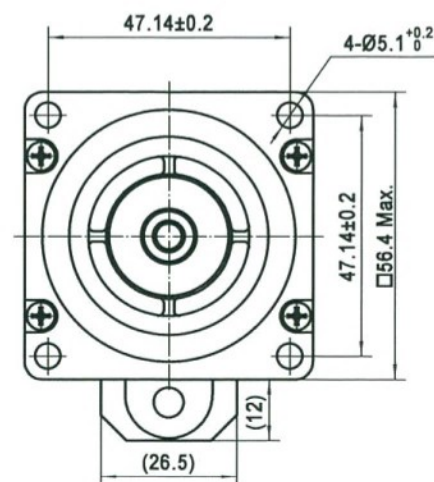

1. 相数 Number of Phase	2
2. 步距角 Step Angle	1.8°
3. 额定电压 Rated Voltage	6.3 V DC
4. 额定电流 Rated Current	1.0 Amp
5. 保持力矩 Holding Torque	0.82 Nm Typ. (Two phase on/ rated current)
6. 相电阻 Phase Resistance	6.3 ohm±10% (20℃)
7. 相电感 Phase Inductance	13.5 mH±20%(1kHz 1V rms)
8. 转子惯量 Rotor Inertia	105 gcm ²
9. 电机重量 Motor Weight	0.42 kg
10. 绝缘等级 Insulation Class	B(130℃)

COLOR	WHT(白)	BLU(藍)	GRN(綠)	ORG(橙)
SIGNAL	CH Z-	CH Z+	CH B-	CH B+
COLOR	YEL(黃)	BRN(棕)	RED(紅)	BLK(黑)
SIGNAL	CH A-	CH A+	+Vcc	GND



日期格式

批准 Approve		
标准化 Standard		
工艺 Technology		
审核 Check		
设计 Design		

This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.

REV.	版本记录 REVISION RECORD	DATE	UNLESS OTHERWISE SPECIFIED	NAMES	SIGNATURE	DATE	Type: ML23HS0L4100-04R	Rev. A0	SCALE 1:1	Sheet 1 of 1
------	----------------------	------	----------------------------	-------	-----------	------	------------------------	---------	-----------	--------------