



1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

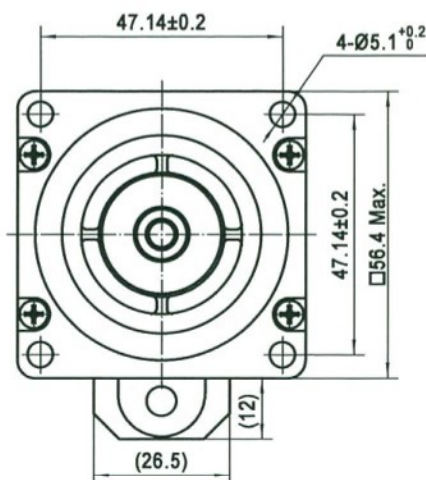

从安装面看为顺时针方向
Clockwise view from mouting side

1. 相数 Number of Phase	2
2. 步距角 Step Angle	1.8°
3. 额定电压 Rated Voltage	4.6 V DC
4. 额定电流 Rated Current	2.0 Amp
5. 保持力矩 Holding Torque	2.3 Nm Typ. (Two phase on/ rated current)
6. 相电阻 Phase Resistance	2.3 ohm±10% (20℃)
7. 相电感 Phase Inductance	9.8 mH±20%(1kHz 1V rms)
8. 转子惯量 Rotor Inertia	365 gcm ²
9. 电机重量 Motor Weight	0.86 kg
10. 绝缘等级 Insulation Class	B(130℃)

COLOR	WHT(白)	BLU(藍)	GRN(綠)	ORG(橙)
SIGNAL	CH Z-	CH Z+	CH B-	CH B+
COLOR	YEL(黃)	BRN(棕)	RED(紅)	BLK(黑)
SIGNAL	CH A-	CH A+	+Vcc	GND

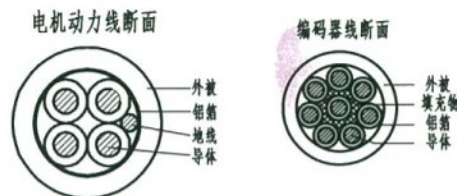

MOONS' STEPPING MOTOR
TYPE ML23HSAL4200-14R
XXXXXXXX YY/MM/DD

Work Order Date Format
加工单号 日期格式

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

MOONS'

Hybrid Stepping Motor

Shanghai MOONS' Electric Co., Ltd.

This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.

Type: ML23HSAL4200-14R	Rev. A0	SCALE 1:1	Sheet 1 of 1
------------------------	---------	-----------	--------------